

Product Features:

Connection is simple, just need to pick up two lines, a joint reverse protection, then do not burn

Starting voltage is low, only 3.50V, can correct measurement

Variable precision: Precision automatic change below 10.0 V, the highest resolution of 0.01 V, Precision automatic 10.0 V above changes, the highest resolution of 0.1 V

Can be used for measuring the car / battery car / motorcycle battery voltage, and other forms of voltage

Can be used in all kinds of voltage measurement purposes


Potting voltmeter head has:**waterproof! Dustproof! Shockproof!**

Real is three, USES the high quality transparent epoxy glue potting. Can be widely used in automobiles, motorcycles, etc., easy to deal with the bad environment.

Technical Parameters:

Weight:	10g
Display color:	Red/Blue/Green/Yellow
Display mode:	Three 0.28 LED digital tube
update rate:	About 1s/time
Physical size:	27 x 15 x 18 mm (L*W* H, not including installation ear)
Opening size:	27 x 15 mm (L*W)
Power supply:	Don't need the power supply, direct use of the test voltage as a power
Lead wire length:	8.5cm
The minimum input:	3.50V
The maximum input:	30.0V
Measurement range:	DC3.50 - 30.0V
Operation temperature:	-10 degrees~65 degrees
Measurement accuracy:	±(1% + 1 Digit)

Red line:Power Supply +,Measure Voltage +,(3.50-30.0V DC)Black line:Power Supply - Measure Voltage-

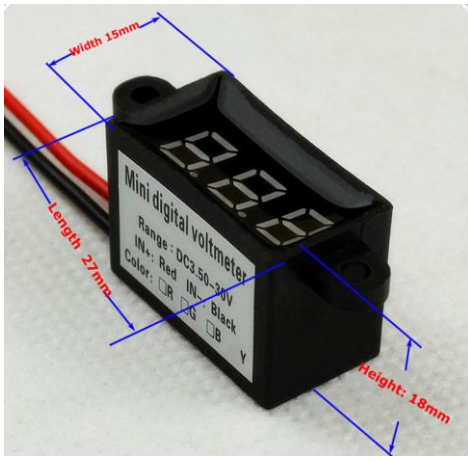

Ruichi



