



HU-XX pitch 2.54mm+Terminal series

■ 壳体 HOUSING

◆ 材料 Material: Nylon 66 UL 94V-0




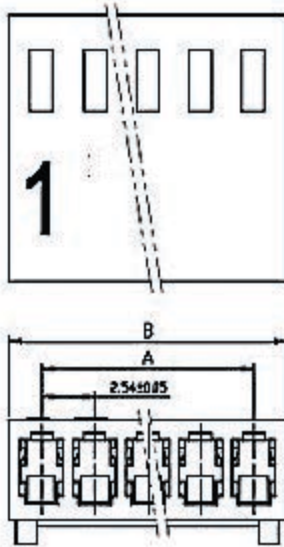


Poles	Part No.	Dimensions mm	
		A	B
2	A2543-H02	2.54	5.76
3	A2543-H03	5.08	8.30
4	A2543-H04	7.62	10.84
5	A2543-H05	10.16	13.38
6	A2543-H06	12.70	15.92
7	A2543-H07	15.24	18.46
8	A2543-H08	17.78	21.00
9	A2543-H09	20.32	23.54
10	A2543-H10	22.86	26.08
11	A2543-H11	25.40	28.62
12	A2543-H12	27.94	31.16
13	A2543-H13	30.48	33.70
14	A2543-H14	33.02	36.24
15	A2543-H15	35.56	37.78
16	A2543-H16	38.10	41.32
--	--	--	--
20	A2543-H20	48.26	51.48

范围	>0~3	>3~18	>18~50	>50~120
公差	±0.12	±0.15	±0.3	±0.5

HU-XX pitch2.54mm=A2543-H

■ 端子 TERMINAL

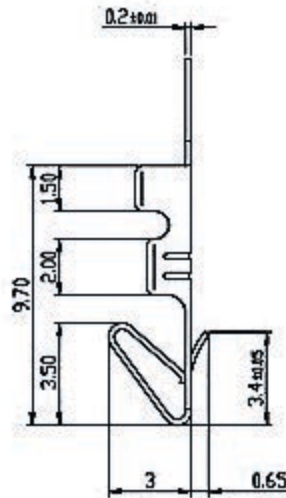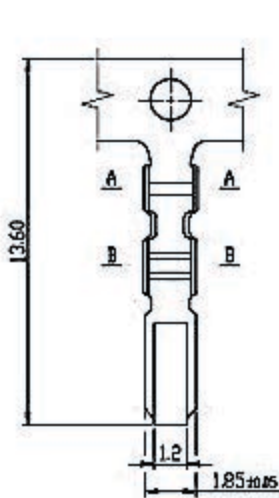

范围	>0~3	>3~18	>18~50	>50~120
公差	±0.12	±0.15	±0.3	±0.5

Part No.	Wire Range	Insulation O.D	Material	Finish	Qty/reel
A2543-TP2	AWG #28 to #22	1.2 to 1.9mm	Phosphor bronze	Tin-plated	10,000pcs
A2543-TP8	AWG #28 to #22	1.2 to 1.9mm	Phosphor bronze	Gold.Ni.plated	10,000pcs

RUICHI