
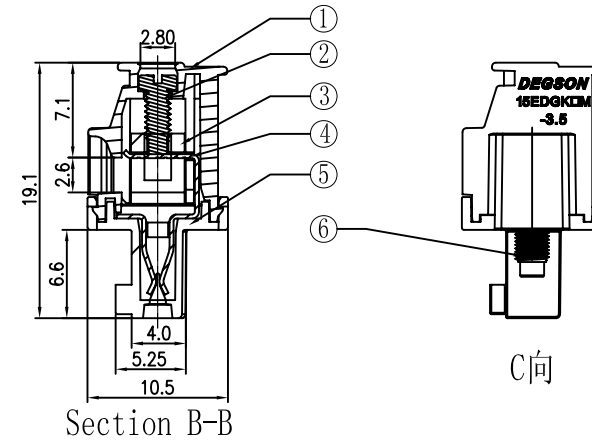


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE

Notes:

1. Pitch: 3.5mm , Poles: 2-22P
2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 28~16AWG, 0.5-1.5mm²
7. Max. Torque Value: M2, 2.04kgf. cm (1.77Lb. in)
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	∇
							0.05/10

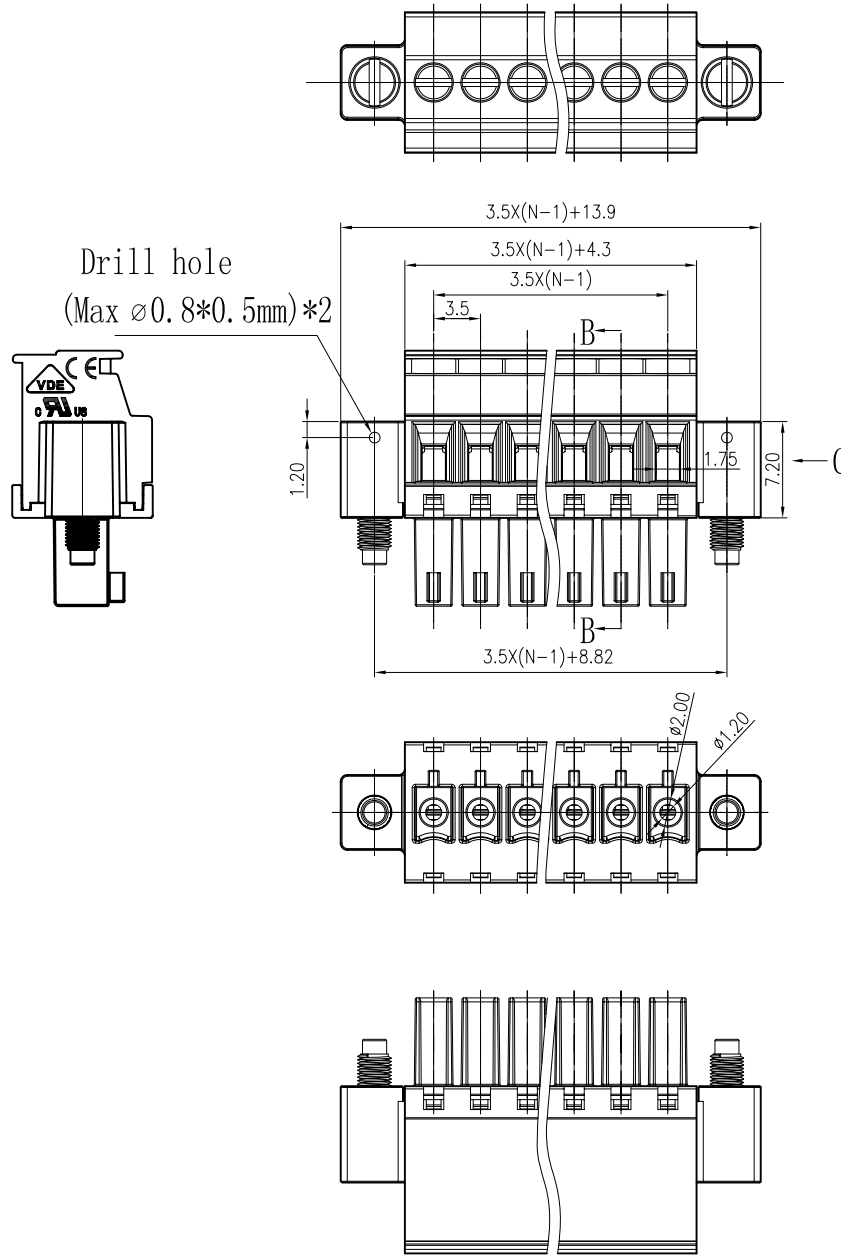

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
6	2EDG Screw-M2.5	S000001370 (H)	2	Steel	Cr ³⁺ Zn
5	15EDGKA/B-3.5-100A-Cover	1033COYXXE (H)	1	PA66	UL94V-0
4	15EDGKA/B-100A-Clamp	1033B00020 (H)	XX	Phosphor bronze	SnCe
3	15EDGK Cage	X000000010 (H)	XX	Brass	Ni Plated
2	15EDG Screw-M2.0	S000001360 (H)	XX	Steel	Cr ³⁺ Zn
1	15EDGKA/BM-3.5-100A-Housing	1034A0YXXE (H)	1	PA66	UL94V-0

DETACHED LISTS	MM (INCH)	DFTO Apple	DATE 04/10/09*	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE	
		MFO	DATE	
		APPVL	DATE	
	MM	±		MATERIAL :
	.0 ±	±		
	.00 ±	±		
	.000 ±	±		
	ANGLES ± 1'	G.E :		NAME
				15EDGKAM-3.5-XXP-1Y-100A (H)
	THIRD ANGLE PROJECTION	FINISH :		DRAWING NO. 15EDGKAM-3.5-E100
				/PART NO.
		SCALE : 1:1		SIZE A3
				REV TO 09/10/09*
				DO NOT SCALE DRAWING
				SHEET 1 OF 1