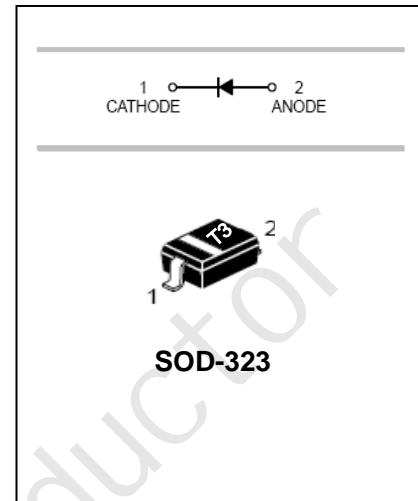


FEATURES

- Fast Switching Speed.
- Surface Mount Package Ideally Suited For Automatic Insertion
- For General Purpose Switching Applications
- High Conductance

APPLICATIONS

- Surface mount fast switching diode

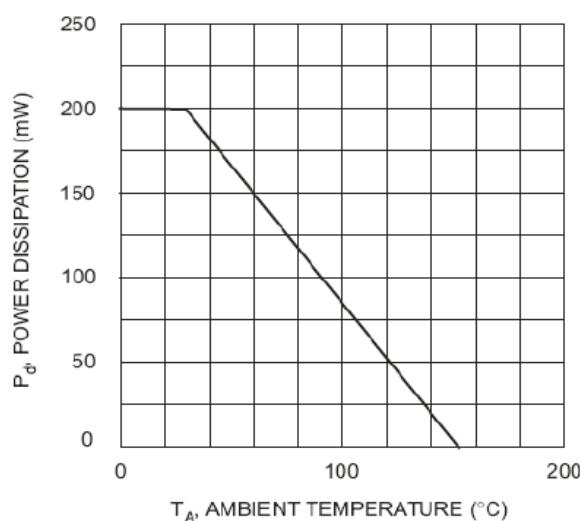
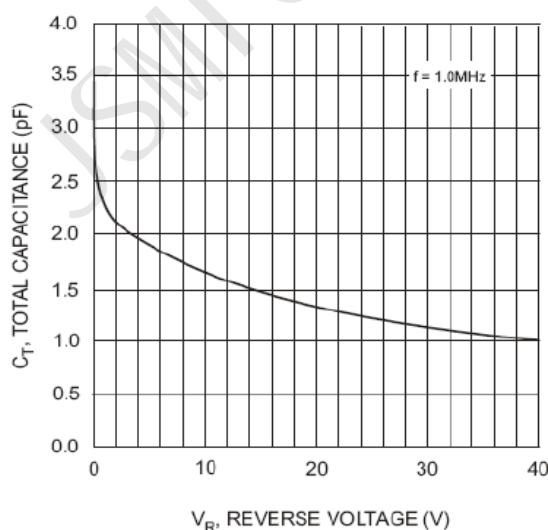
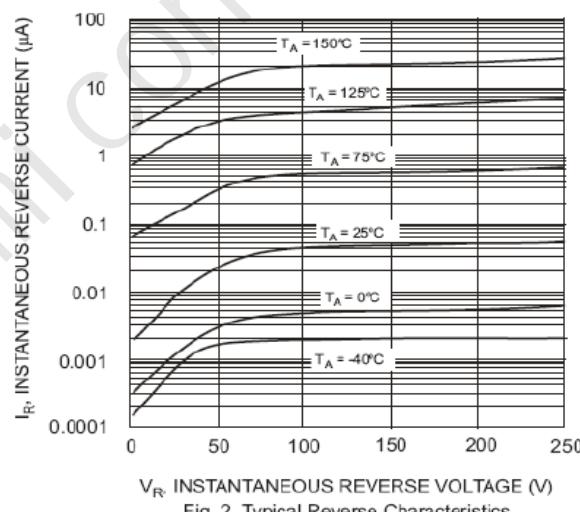
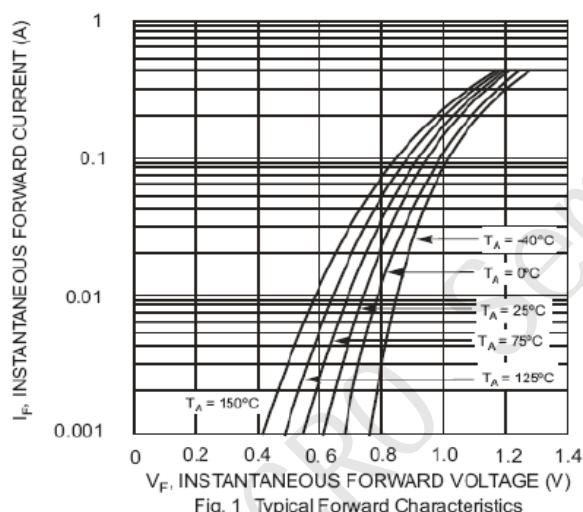


MAXIMUM RATING @ Ta=25°C unless otherwise specified

Characteristic	Symbol	BAS321	Unit
Repetitive Peak Reverse Voltage	V _{RRM}	250	V
Working Peak Reverse Voltage	V _{RWM}	200	V
DC Reverse Voltage	V _R		
RMS Reverse Voltage	V _{R(RMS)}	141	V
Forward Continuous Current	I _{FM}	400	mA
Average Rectified Output Current	I _o	200	mA
Non-Repetitive Peak Forward Surge Current @t=1.0 μs @t=1.0 s	I _{FSM}	2.5 0 .5	
Repetitive Peak Forward Surge Current	I _{FRM}	625	mA
Power Dissipation	P _d	200	mW
Thermal Resistance Junction to Ambient Air	R _{θJA}	625	°C/W
Operating and Storage Temperature Range	T _j , T _{STG}	-65 to +150	°C

ELECTRICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

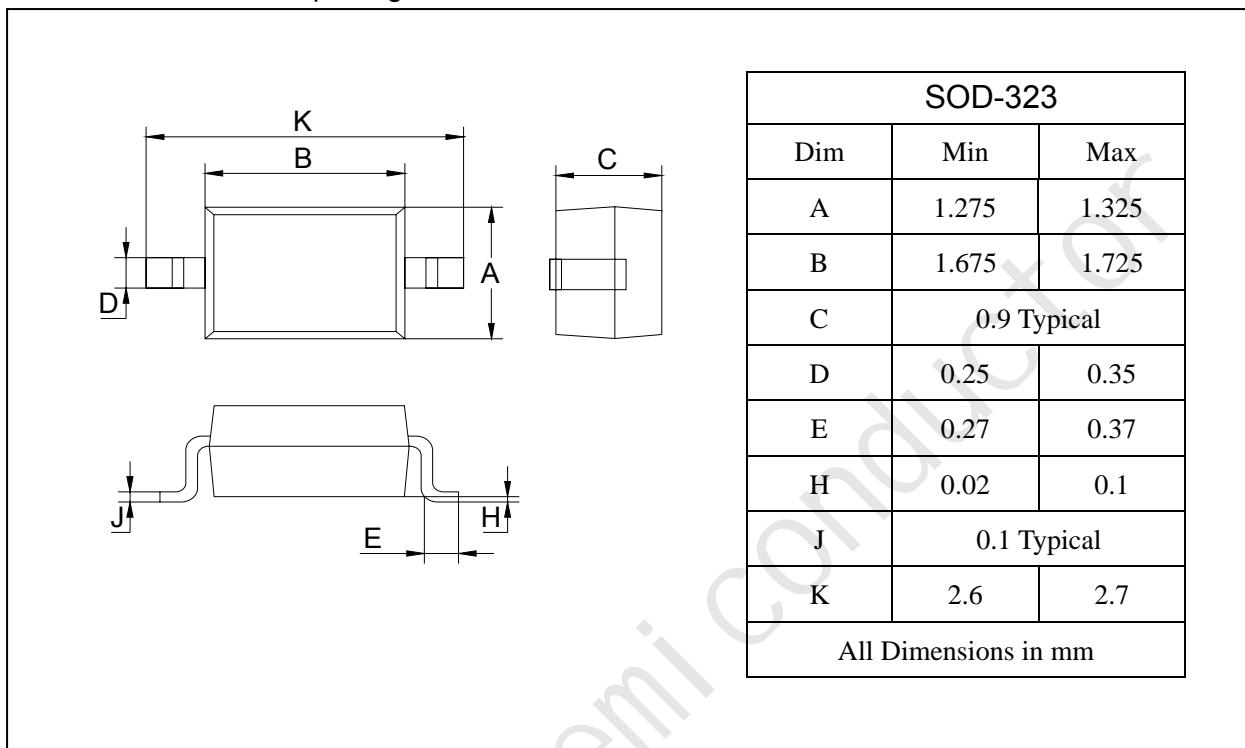
Characteristic	Symbol	Min	Max	Unit	Test Condition
Forward Voltage	V_{FM}	-	1.0 1.25	V	$I_F=100\text{mA}$ $I_F=200\text{mA}$
Reverse Current	I_R	BAS321	-	0.1	μA
Capacitance between terminals	C_T	-	5	pF	$V_R=0, f=1.0\text{MHz}$
Reverse Recovery Time	t_{rr}	-	50	ns	$I_F=I_R=30\text{mA}$, $I_{rr}=0.1 \times I_R, R_L=100\Omega$

 TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified


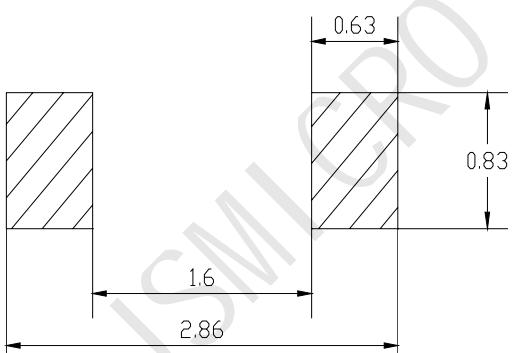
PACKAGE OUTLINE

Plastic surface mounted package

SOD-323



SOLDERING FOOTPRINT



Unit : mm

PACKAGE INFORMATION

Device	Package	Shipping
BAS321	SOD-323	3000/Tape&Reel