


Housing with contact

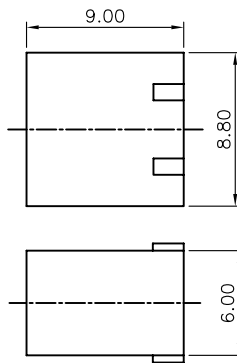

Hood

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/09/05'		

NOTES:

1.SPECIFICATIONS

- .CURRENT RATING: 0.5A/pin Max.
- .VOLTAGE RATING: 30V(DC)
- .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
- .CONTACT RESISTANCE: 50mΩ Max.
- .INSULATION RESISTANCE: 100MΩ Min
- .TEMPERATURE RANGE: -20°C+70°C


2.MATERIALS

- .HOUSING: PBT.
- .HOOD: ABS.
- .SHELL: STEEL
- .CONTACT: COPPER ALLOY


3.PRODUCT NUMBER CODE:

DS1105-01 - X X X X





- Contact plating
- 0: Selective gold flash
- C: Selective 3u" gold
- 3: Selective 30u" gold
- Shell plating
- 6: Tin
- N: Nickel
- 8: Full gold
- Color of Hood
- B: BLACK
- Color of housing
- B: BLACK
- Products series
- DS1105-01



Upper shell

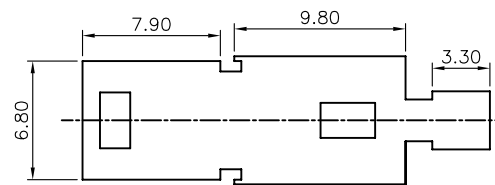

Down shell



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNIT	TITLE	
X.	±0.60	X.	±5°		mm	MINI USB 5PIN A TYPE MALE SOLDER	
.X	±0.38	.X	±3°			SHEET SIZE	A4
.XX	±0.25	.XX	±2°			SERIES	DS1105-01 SERIES
DRAWING TYPE				CUSTOMER			
SCALE				1:1 SHEET 1 OF 1			
DRAWING NO.				C-DS1105-01-XXX			
USBM-SP 1105-01							