


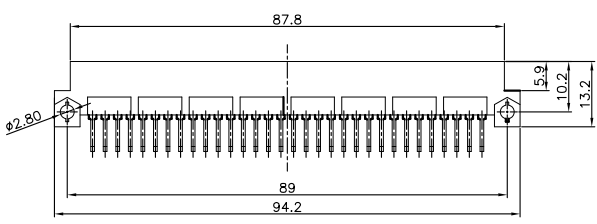
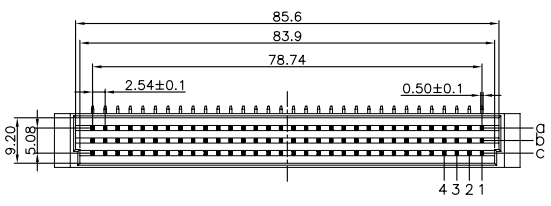



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
				LJC 07/04/05

MALE

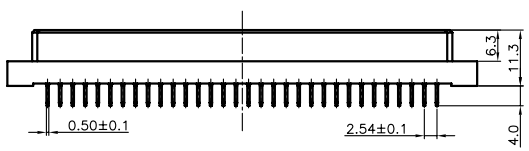

FEMALE

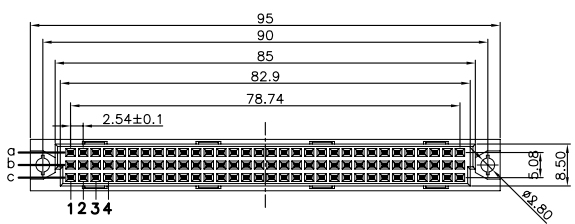

NOTES:

1. SPECIFICATIONS

- . Contact Resistance: 30mΩ max.
- . Insulator Resistance: 1000MΩ min.at DC 500V
- . Current Rating: 2Amps
- . Dielectric withstanding voltage: AC 500V For 1 minute
- . Operating Temperature: -20°C to +70°C
- . Contact: Copper alloy
- . Housing: PBT

2. Product Unmber code:

DS1120 - X X X X X X

- Column with Contacts type
 - 1: 1-3 type
 - 2: 2-4 type
 - 3: 1-2-3 type
- Rows with Contacts type
 - 1: abc type(3 rows with contact)
 - 2: ac type(2 rows with contact)
- Mounting type
 - R: right angle type
 - V: V/T type
- Contact plating
 - 6: full Tin plating
 - 0: selective gold flash
- Connector type
 - M:male
- No.of contacts
 - 96 48

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	⊕	TITLE
X.	±0.60	X.	±5°	UNITS	mm	DIN 41612 R TYPE(3ROWS)
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1120 SERIES
.XX	±0.25	.XX	±2°	DIN41612 3*32 64		DIN41612 3*16 48
DRAWING TYPE		CUSTOMER		DIN41612 3*32 64		DIN41612 3*32 32
SCALE		1:1	SHEET 1 OF 1	DIN41612 3*32 64		DIN41612 3*32 32
DRAWING NO.		C-DS1120-XXXXXXX		DIN41612 3*32 96		DIN41612 3*32 48
				DIN41612 3*32 96		DIN41612 3*32 48
				DIN41612 3*32 96		